


Typical Application

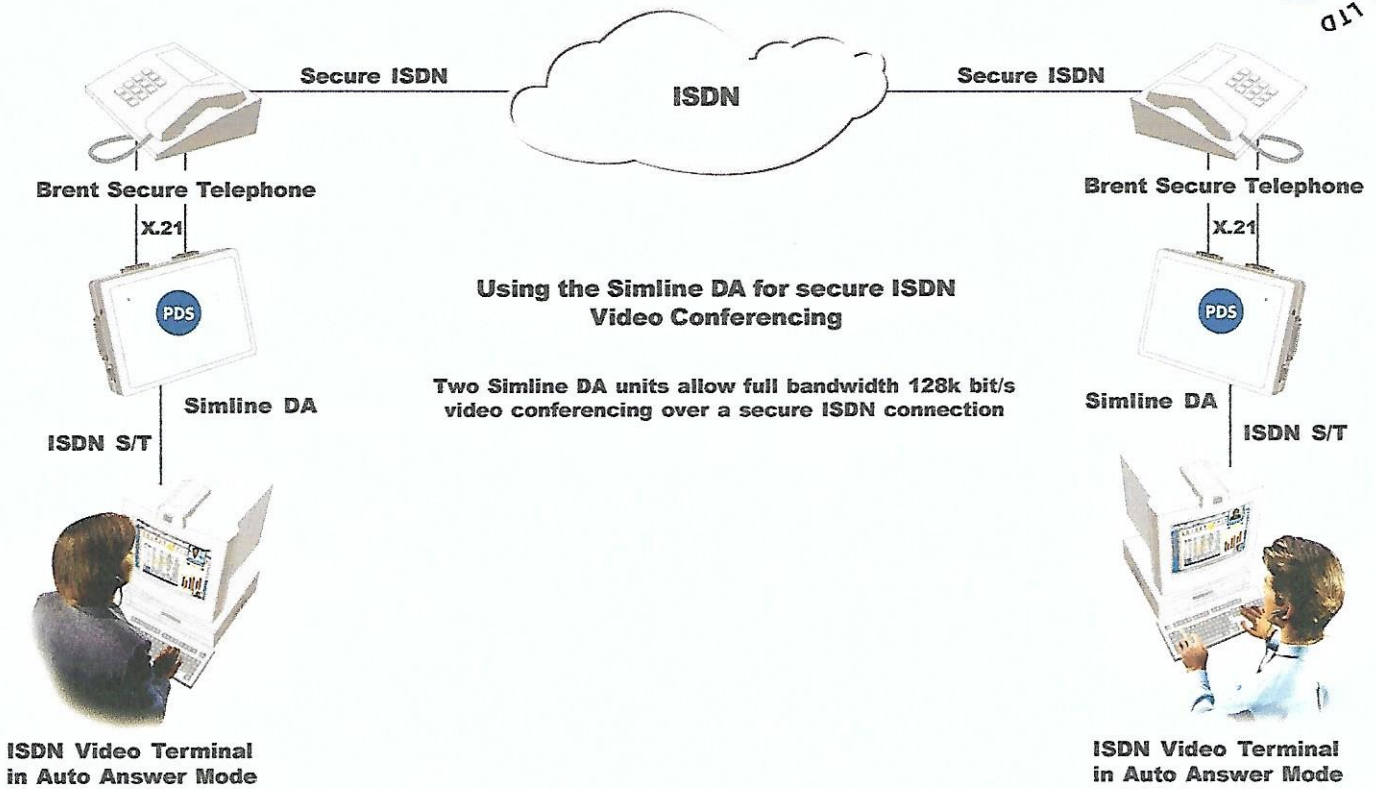

Specification

Interfaces

Euro ISDN compatible I.420 NT connection via RJ45 socket
2 x DB15 Male (X.21 DTE) V.11 ports
Parallel Port (for upgrade if necessary)

LED Indicators

B1 / B2 Channel Active
PS1 (Power Source 1) Active
PH (Physical Layer - Layer 1) Active
DL (Datalink Layer - Layer 2) Active

Power

9v D.C at 500mA via universal mains adapter

Operating/Storage Temperature

0 - +40° C

Relative Humidity

90% non-condensing

Size

190 x 140 x 47mm

Weight

525g



Specifications subject to change without prior notice. Issue 6.0
©Packet Data Systems Ltd 2007.

Distributed by:

Packet Data Systems Ltd

The Wharf, P.O Box 48, Pangbourne, Berkshire, RG8 7EG, United Kingdom

Tel: +44 (0)118 9845944 Fax: +44 (0)118 9844559 email: info@pds-test.co.uk website: www.pds-test.co.uk